
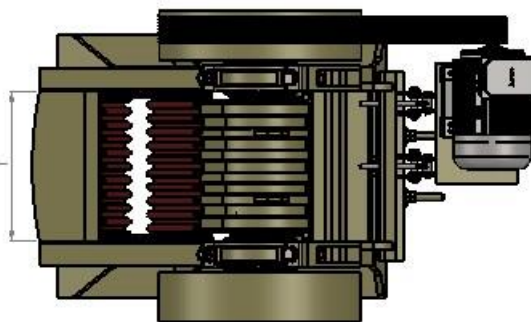
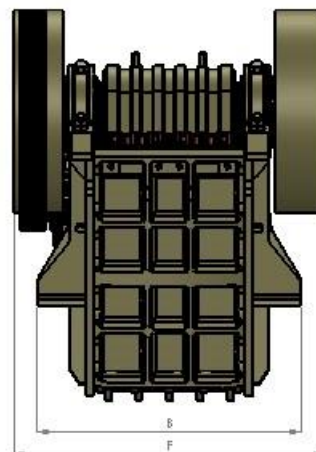
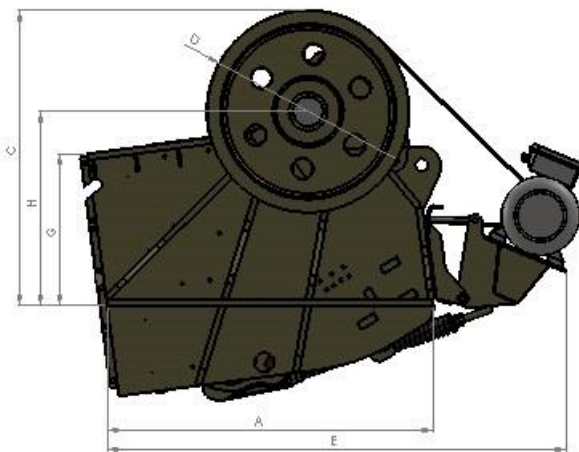


## QUALITY, RELIABLE JAW CRUSHERS

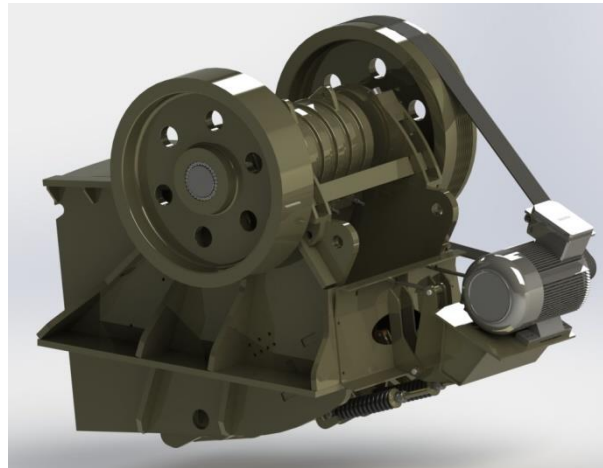

	A	B	C	D	E	F	G	H	I
K-02	1700	1608	2210	1200	2106	2070	1241	1605	988
K-03	2380	1735	2822	2365	2500	2300	1240	1500	980
K-07	2580	2086	2542	1600	3635	2460	1202	1538	1190
K-11	3070	1780	3470	1800	3070	2820	2590	2570	1340
K-04 (SECONDER)	2380	1735	2822	2365	1382	3330	800	1860	765
K-12 (SECONDER)	2380	1735	2822	2365	1382	3330	800	1860	1010

## MAIN FEATURES

- Welded, bolted construction body
- Easy to change screen wires
- Clack front grooves providing flow in the desired direction
- Anti-wear Stone-Box front grooves
- There is a maintenance platform on the top and sides of the chin
- Spare parts and service books
- User and maintenance books

Model	Total Capacity	Engine Power	Jaw Dimensions
K-02	50-60 ton/h	30 kW	610x380 mm
K-03	140-160 ton/h	75 kW	900x650 mm
K-07	250-300 ton/h	132 kW	1100x850 mm
K-11	400-450 ton/h	160 kW	1300x1000 mm

## TECHNICAL SPECIFICATIONS

- Manual hydraulic indicator group
- Moving coil for heavy duty (SKF brand)
- Pitman spring protected trigger
- GS-52 steel casting pitman
- GS-45 steel casting side housing
- 16-18 mangan body protection liner

Model	Total Capacity	Engine Power	Jaw Dimensions
K-04	50-60 ton/h	30 kW	900x200 mm
K-12	140-160 ton/h	55 kW	1100x350 mm