
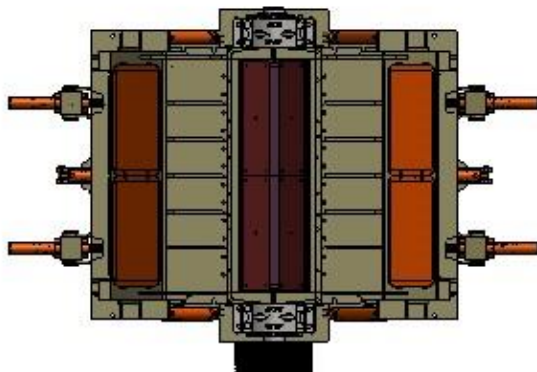
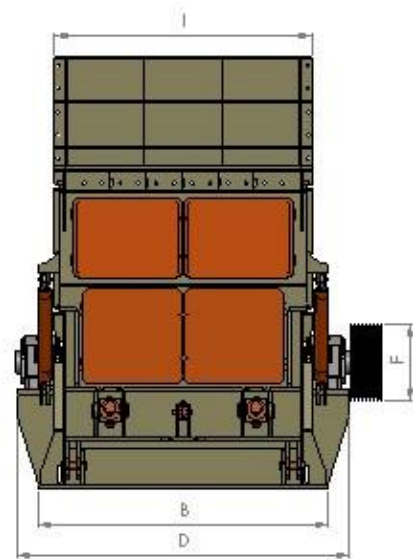
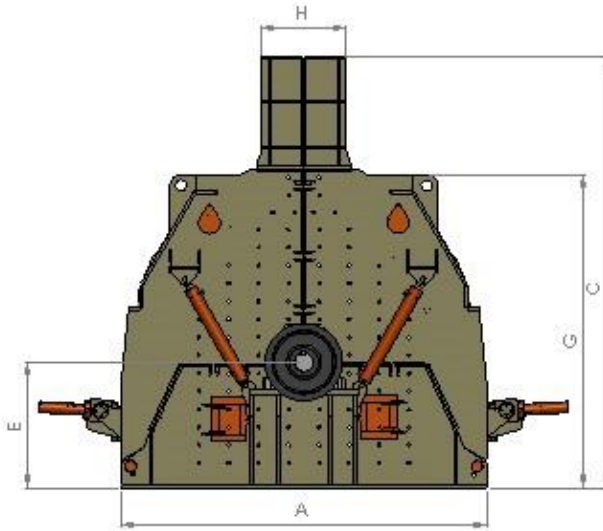


## QUALITY, RELIABLE

### TERTIARY CRUSHER

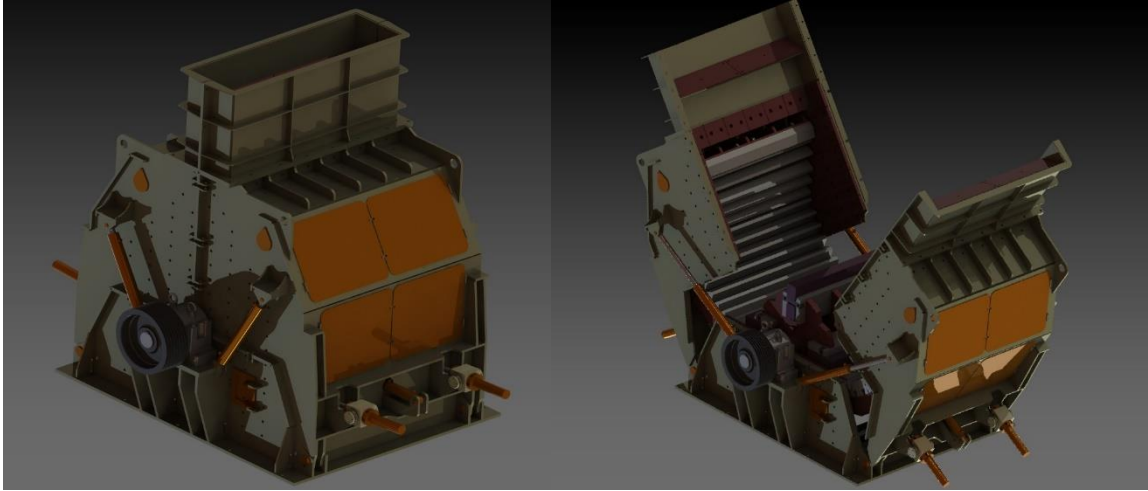

	A	B	C	D	E	F	G	H	I
CTL-1210	2500	1610	2955	1710	863	530	2150	580	1240
CTL-1212	2500	1720	2955	1930	863	530	2150	580	1460
CTL-1215	2500	1980	2955	2270	863	530	2150	580	1760
CTL-1275	2500	1270	2955	1480	863	530	2150	580	1010

## MAIN FEATURES

- Bolted, easily removable steel construction
- Easy maintenance and repair
- Piston hydraulic system, electric hydraulic unit
- Two layers of anti-corrosion acrylic
- Spare parts and service books
- User and maintenance books

Model	Total Capacity
CTC-1210	130-140 ton/hour
CTC-1212	180-200 ton/hour
CTC-1215	250-300 ton/hour

## TECHNICAL SPECIFICATIONS

- 4 wear-resistant special cast pallets
- Machine side lining thickness 30 mm 16-18 Manganese alloy casting
- A1 quality ST-37 sheet
- Heavy-duty bearing

Model	Engine Power
CTC-1210	160 kW 1500 rpm
CTC-1212	200 kW 1500 rpm
CTC-1215	250 kW 1500 rpm